

Sliver Cans & Accessories

Technical data sheet

Detailed BANIX selection sheet with documented family data, dimension guidance and an enquiry checklist.



Contents

Sliver Cans

Sliver-Can Accessories & Wheels

Confirm before ordering

Family-level guidance, not a machine-specific approval or a guaranteed performance rating. Dimension examples do not establish availability. The accepted quotation and approved drawing define the supplied product.

Reviewed product-family data. Dimensions, limits and availability are confirmed for the selected configuration.



Sliver Cans

Antistatic HDPE sliver cans with broad documented size ranges and configurable handling components.



Documented family data


Parameter	Recorded options / data
Documented diameters / mm	225, 250, 300, 350, 400, 450, 500, 600, 700, 800, 900, 1000, 1350, 1500
Overall height	700-1800 mm including wheels; selected configuration
Body / upper ring	Anti-static HDPE / polished stainless steel
Pallet / chassis	ABS pallet / reinforced zinc-plated chassis
Spring configurations	Spiral, pagoda, tensor or trestle; lift-balanced support recommended above 500 mm diameter

Recorded family options and dimensional examples. Values from different variants cannot be combined. Confirm the selected construction, units and operating limits with the BANIX quotation.



Sliver Cans

Dimension guide

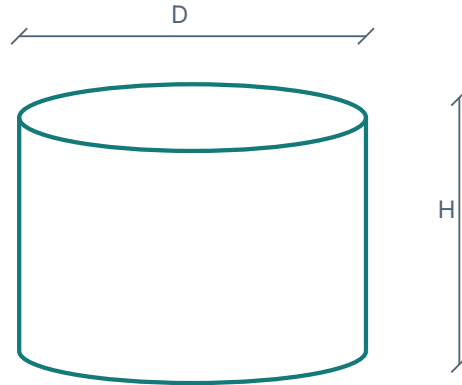

Schematic only, not to scale. Use your drawing to identify the exact measuring points.

Dimensions and information for your enquiry

Dimensions and information for your enquiry	Your specification
Can diameter / mm	_____
Total height including wheels / mm	_____
Filled sliver mass / kg	_____
Spring type and working stroke / mm	_____
Top plate and coiler clearance	_____
Wheel mounting and floor conditions	_____

Family-level guidance, not a machine-specific approval or a guaranteed performance rating. Dimension examples do not establish availability. The accepted quotation and approved drawing define the supplied product.

Send your drawing and requirement to info@banix.de



Sliver-Can Accessories & Wheels

Springs, wheels, hoops, chassis and related replacement components for sliver-can handling.



Documented family data


Parameter	Recorded options / data
Parts	Springs, pallets, rings, bands, chassis and fixed / swivel wheels
Recorded wheel installation heights	72, 78 or 85 mm; not wheel diameters
Mounting example A	Plate 70 x 58 mm; hole spacing 54 x 42 mm; aperture 7 mm
Alternative mounting	Separate mounting geometry exists; confirm drawing and installed height before replacement

Recorded family options and dimensional examples. Values from different variants cannot be combined. Confirm the selected construction, units and operating limits with the BANIX quotation.



Sliver-Can Accessories & Wheels

Dimension guide

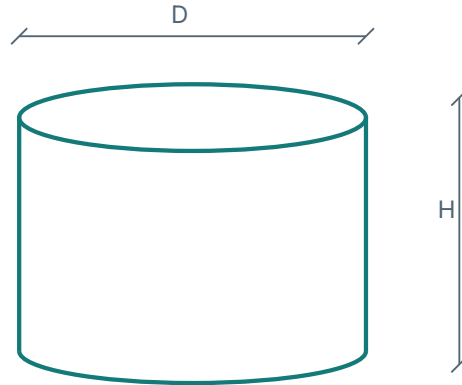

Schematic only, not to scale. Use your drawing to identify the exact measuring points.

Dimensions and information for your enquiry

Dimensions and information for your enquiry	Your specification
Existing can diameter and height / mm	_____
Mounting plate and hole spacing / mm	_____
Wheel diameter and installed height / mm	_____
Wheel load, fixed / swivel type	_____
Spring stroke and filled mass	_____
Ring, hoop or plate dimensions / mm	_____

Family-level guidance, not a machine-specific approval or a guaranteed performance rating. Dimension examples do not establish availability. The accepted quotation and approved drawing define the supplied product.

Send your drawing and requirement to info@banix.de